


ECN0046845

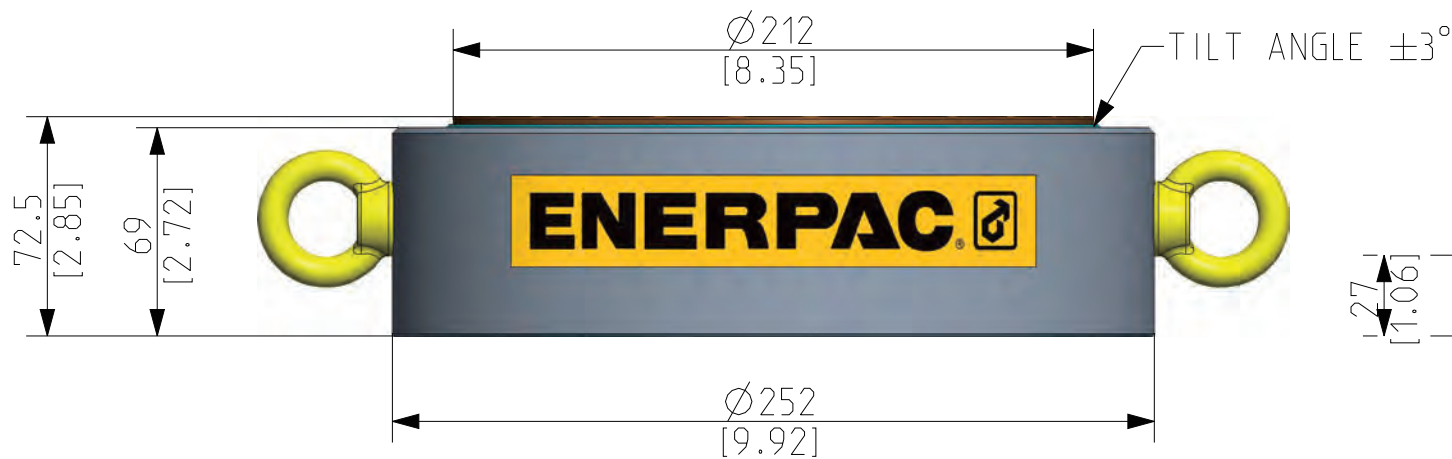

CYLINDER CHARACTERISTICS

PUSHING PRESSURE	700bar / 10.150psi
PUSHING CAPACITY	259.1Ton/2541.4KN
EXTERNAL DIAMETER	252mm / 9.92in
INTERNAL DIAMETER	215mm / 8.46in
EFEC AREA (PUSHING)	363.1cm ² / 56.27in ²
OIL CAPACITY (PUSHING)	562.7cm ³ / 34.34in ³
TILTED STROKE	10mm / 0.39in
STRAIGHT STROKE	15.5mm / 0.61in
WEIGHT	27.3kg / 60.2lbs

Language Code - Primary/Secondary eng/	Document Type: Assembly	Description: CUSP250 ID DRAWING			
FIRST ANGLE PROJECTION 	Technical Reference: JCG				
DO NOT SCALE DRAWING	Approver: JCG	Rev D	Date of Issue 2017OCT09	B170042ID-6	Sheet 1/1
Per ASME Y14.5 - 2009	Creator: MRM	This print and information herein is confidential and proprietary and is the property of ENERPAC. It is not to be copied or reproduced without written permission. ENERPAC 			