
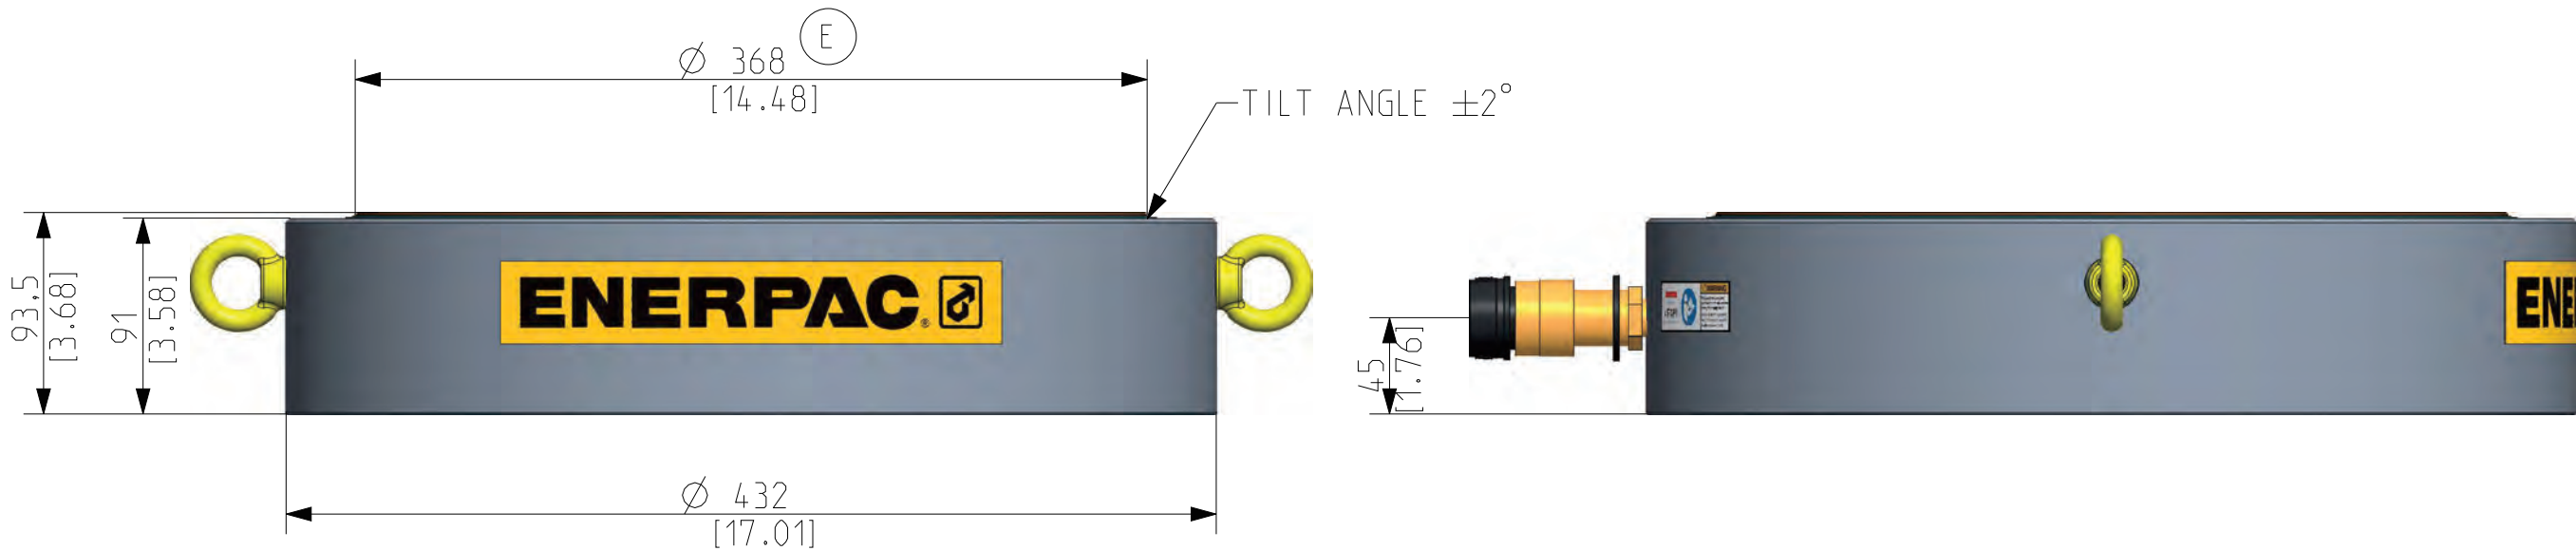


ECN0052676

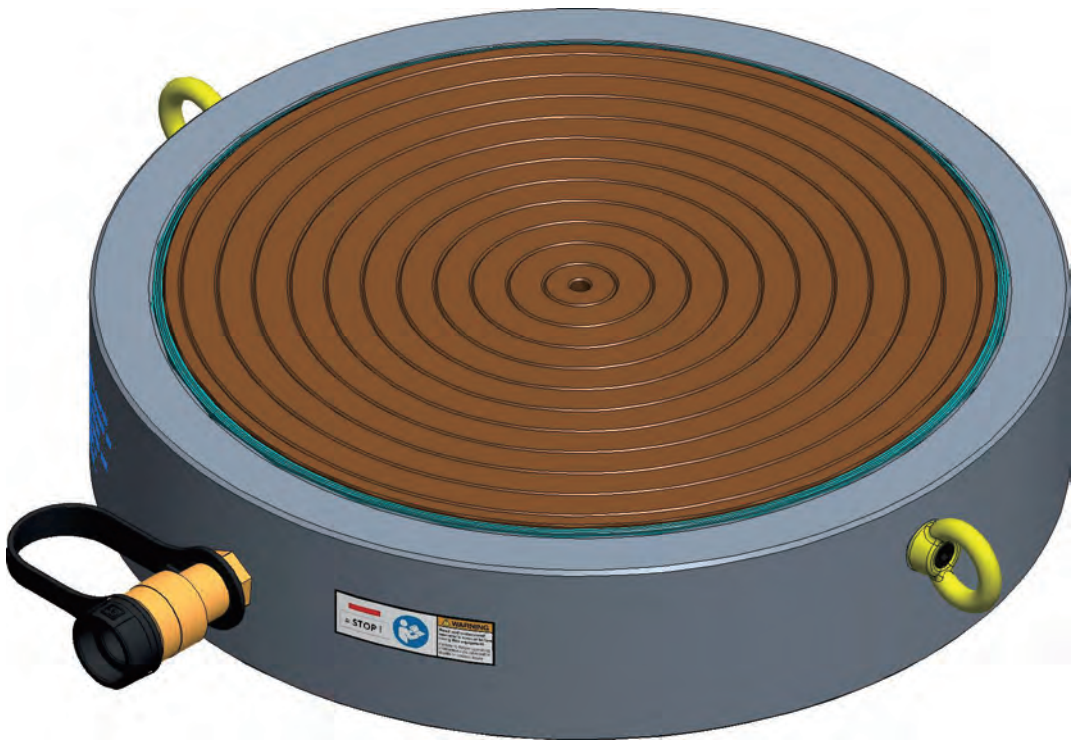

CYLINDER CHARACTERISTICS	
PUSHING PRESSURE	700bar / 10.150psi
PUSHING CAPACITY	767.5Ton / 7526.5KN
EXTERNAL DIAMETER	432mm / 17.01in
INTERNAL DIAMETER	370mm / 14.57in
EFEC AREA (PUSHING)	1075.2cm^2 / 166.66 in^2
OIL CAPACITY (PUSHING)	1752.6cm^3 / 106.95in^3
TILTED STROKE	10mm / 0.39in
STRAIGHT STROKE	16.3mm / 0.64in
WEIGHT	105.2kg / 231.9lbs

Language Code - Primary/Secondary eng/	Document Type: Assembly	Description: CUSP750 ID DRAWING			
FIRST ANGLE PROJECTION	Technical Reference: JCG				
DO NOT SCALE DRAWING	Approver: JCG	Rev E	Date of Issue 2018JUL31	B170042ID-11	Sheet 1/1
Per ASME Y14.5 - 2009	Creator: MRM	This print and information herein is confidential and proprietary and is the property of ENERPAC. It is not to be copied or reproduced without written permission. ENERPAC			