





12 Trailers - Carrousel Mode

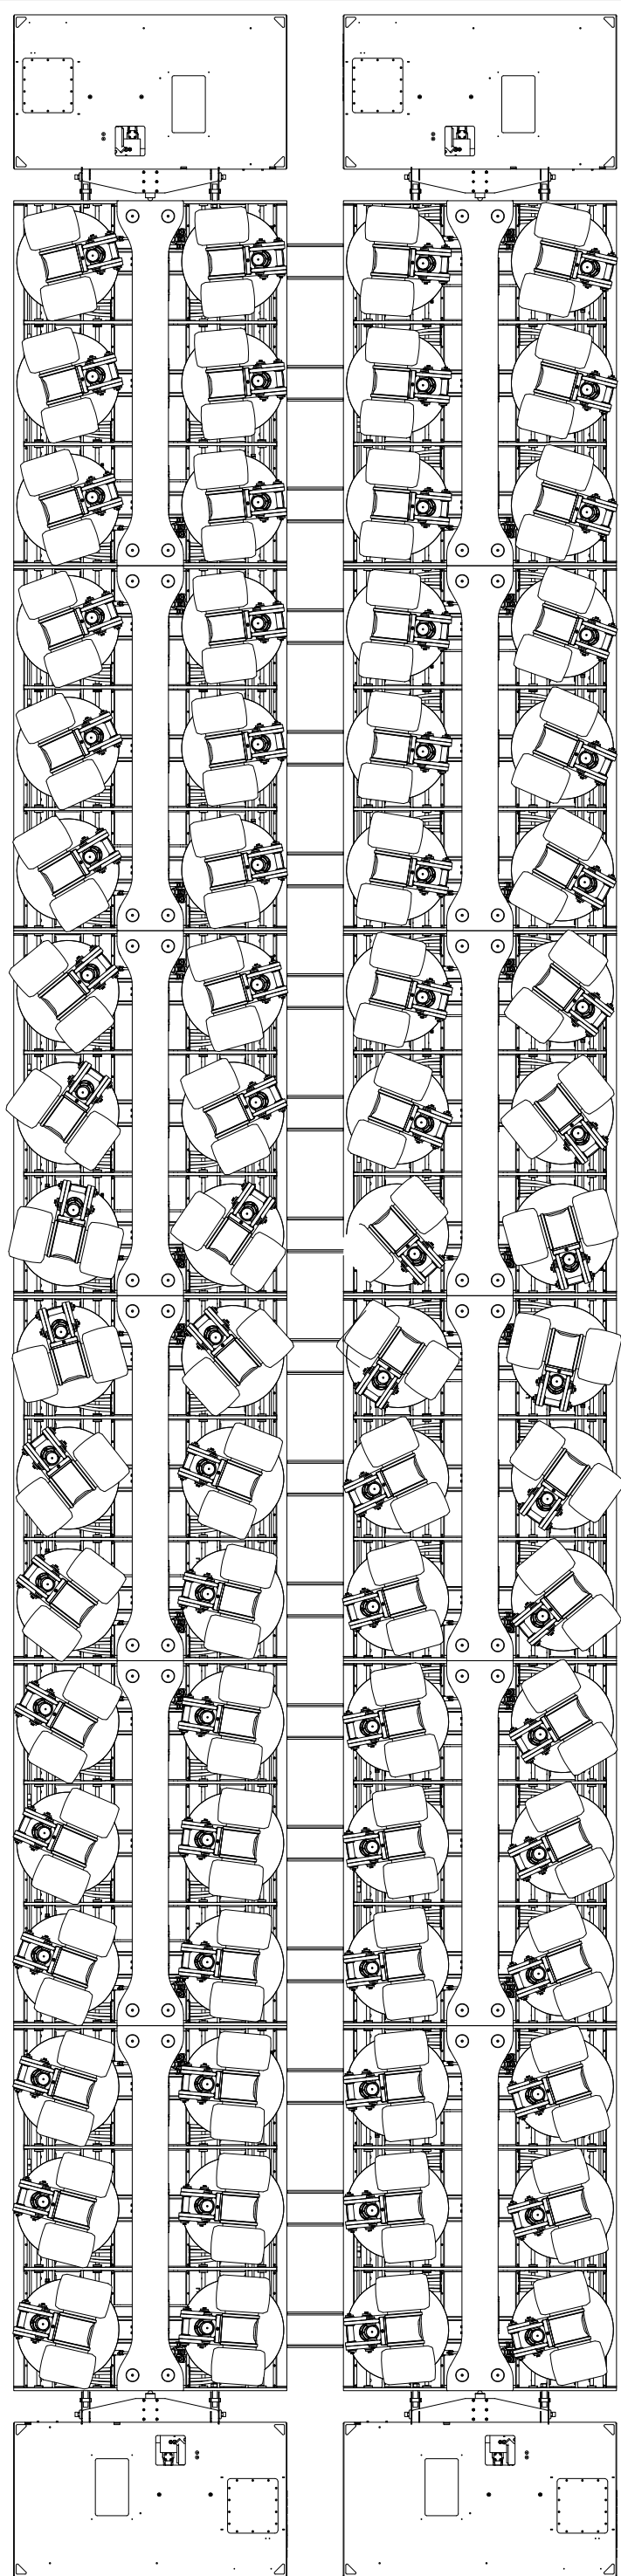

12 Trailers - Normal Steering Mode





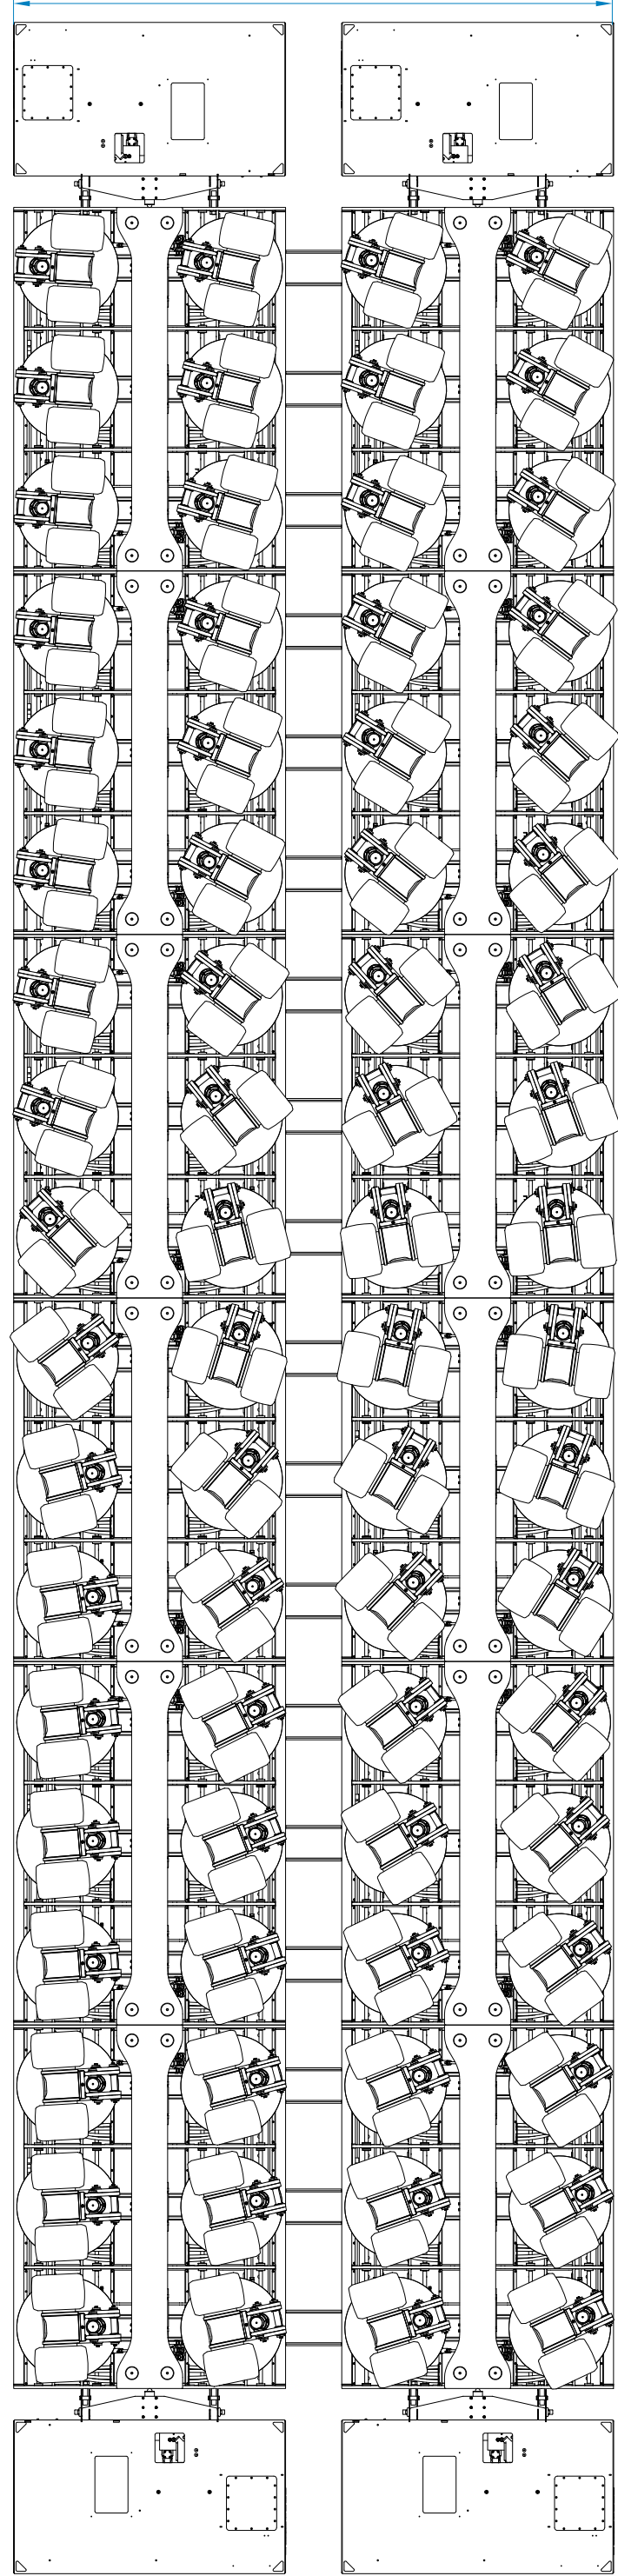


12 Trailers - Crab Steering Mode

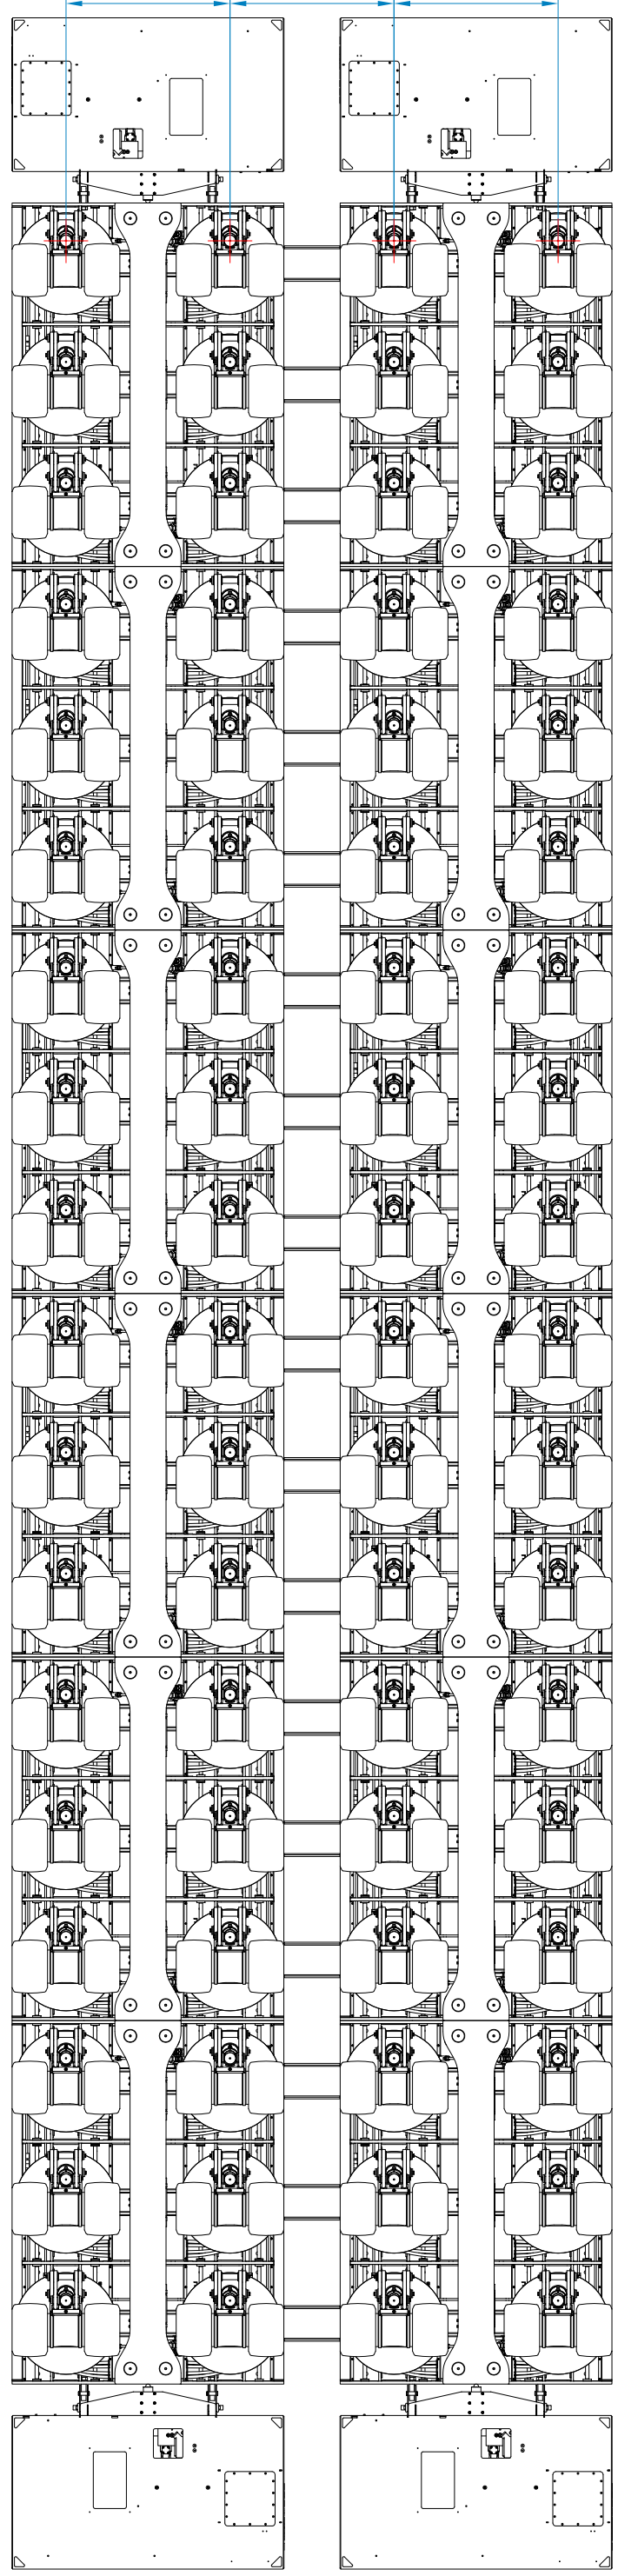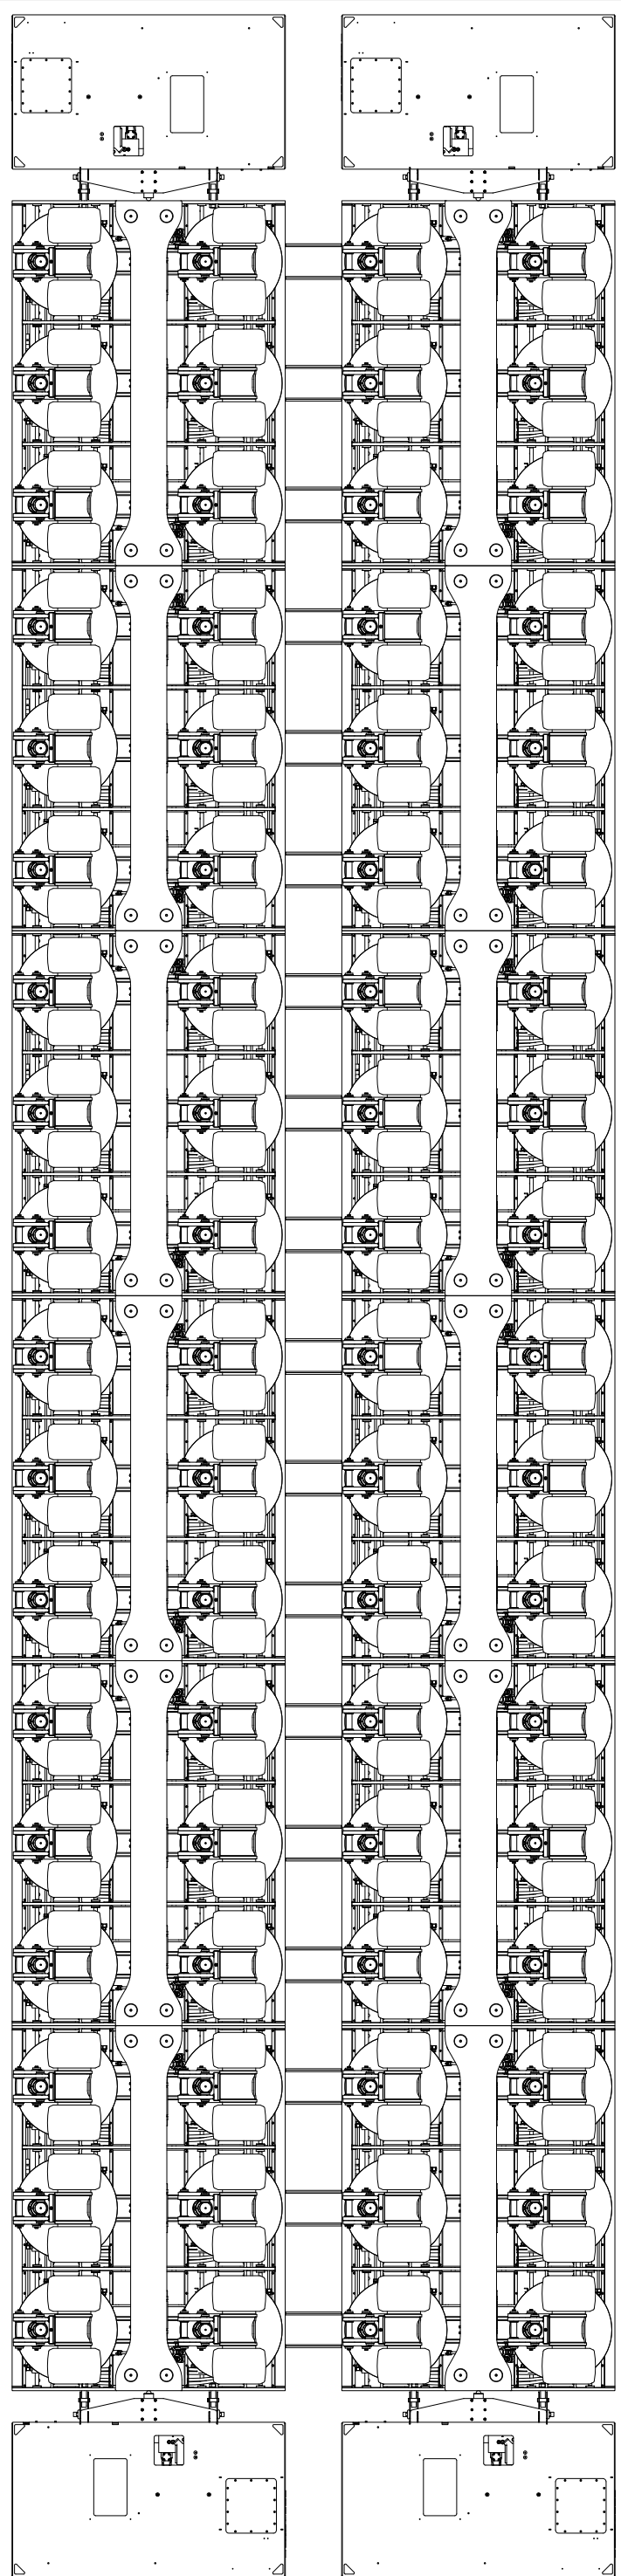

2 Trailer Arrangement (1 : 25)

6150

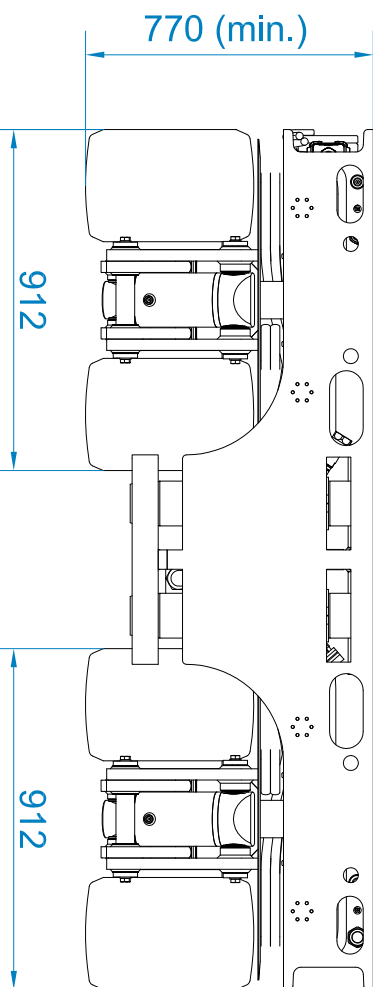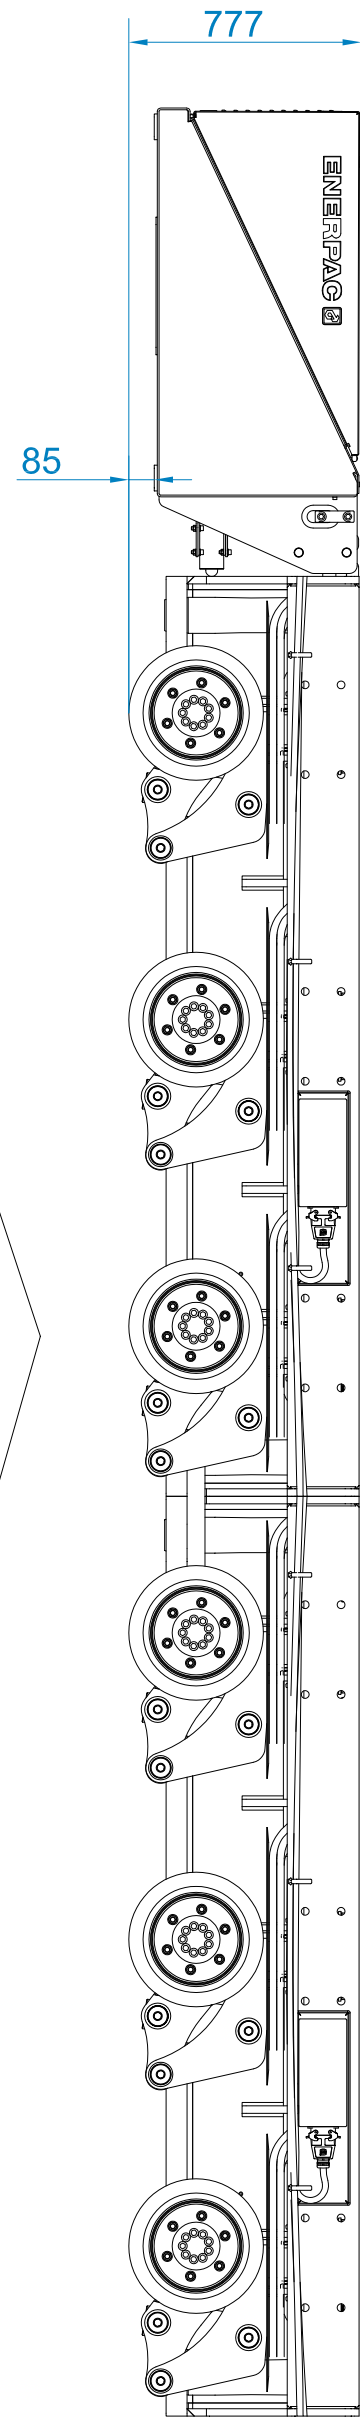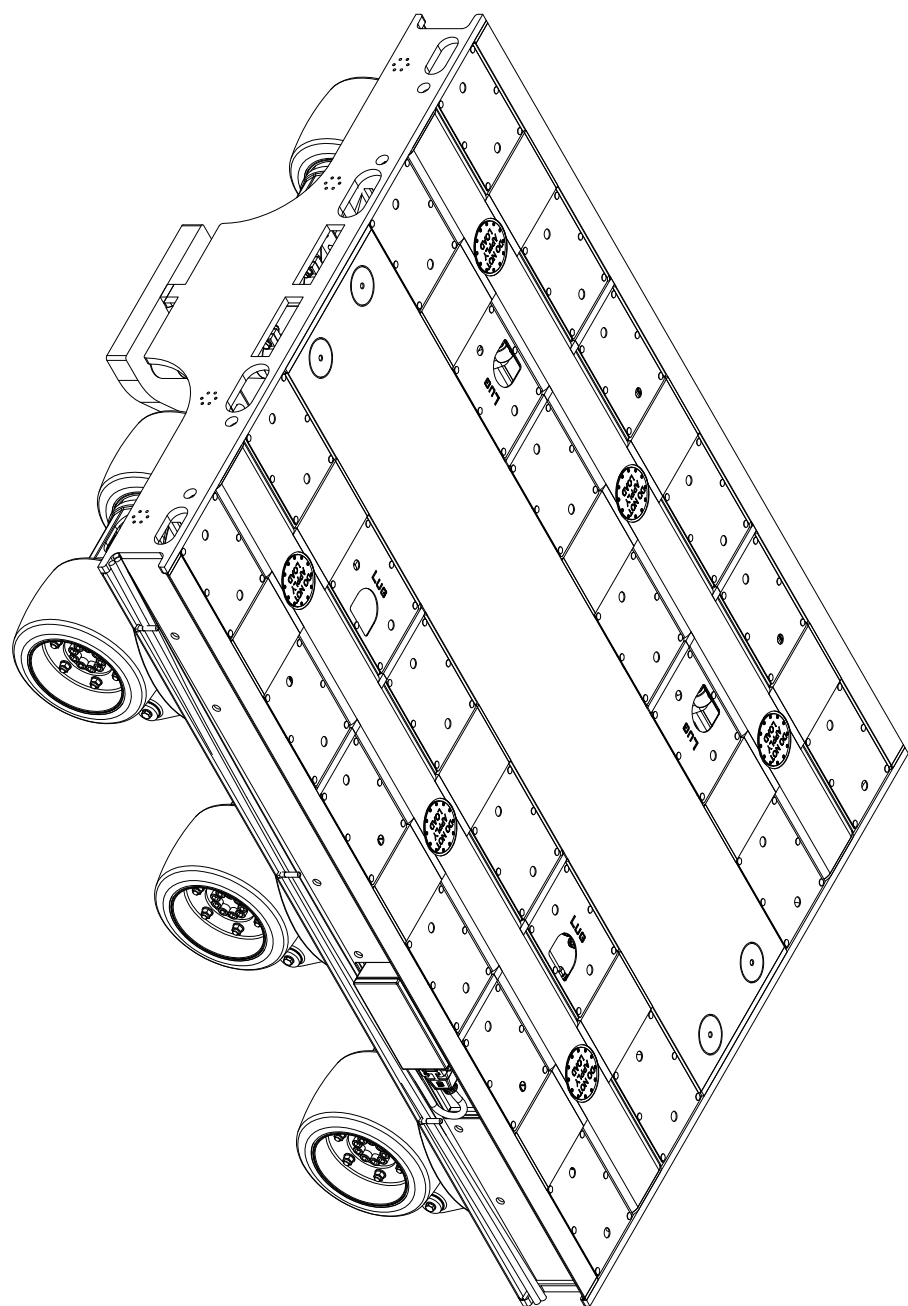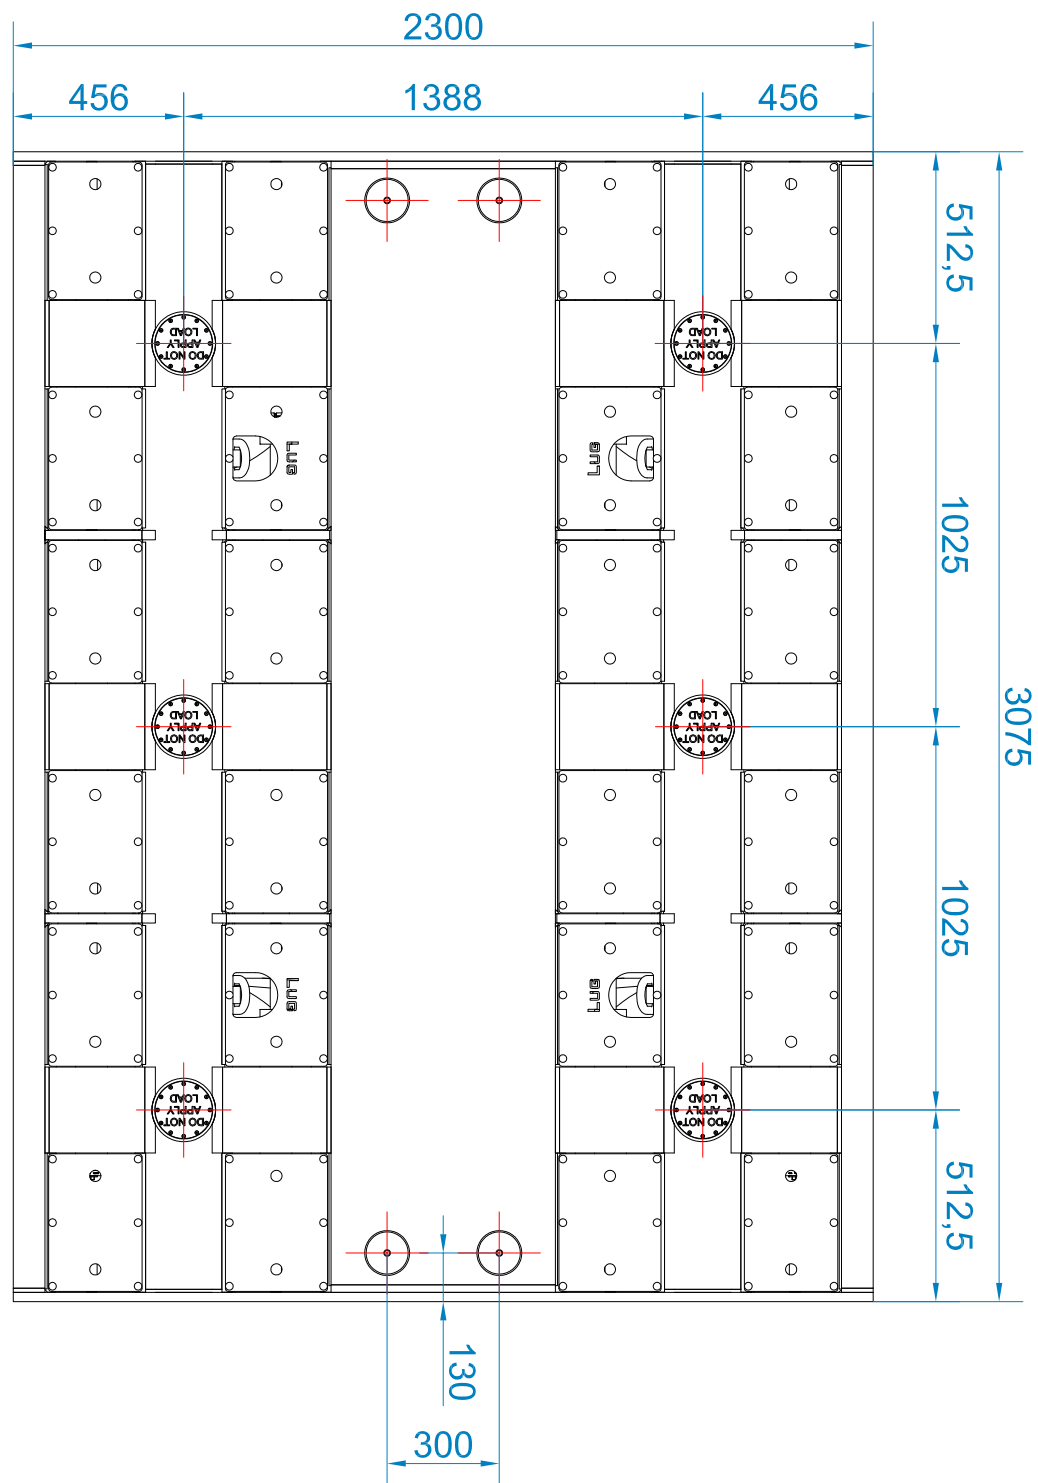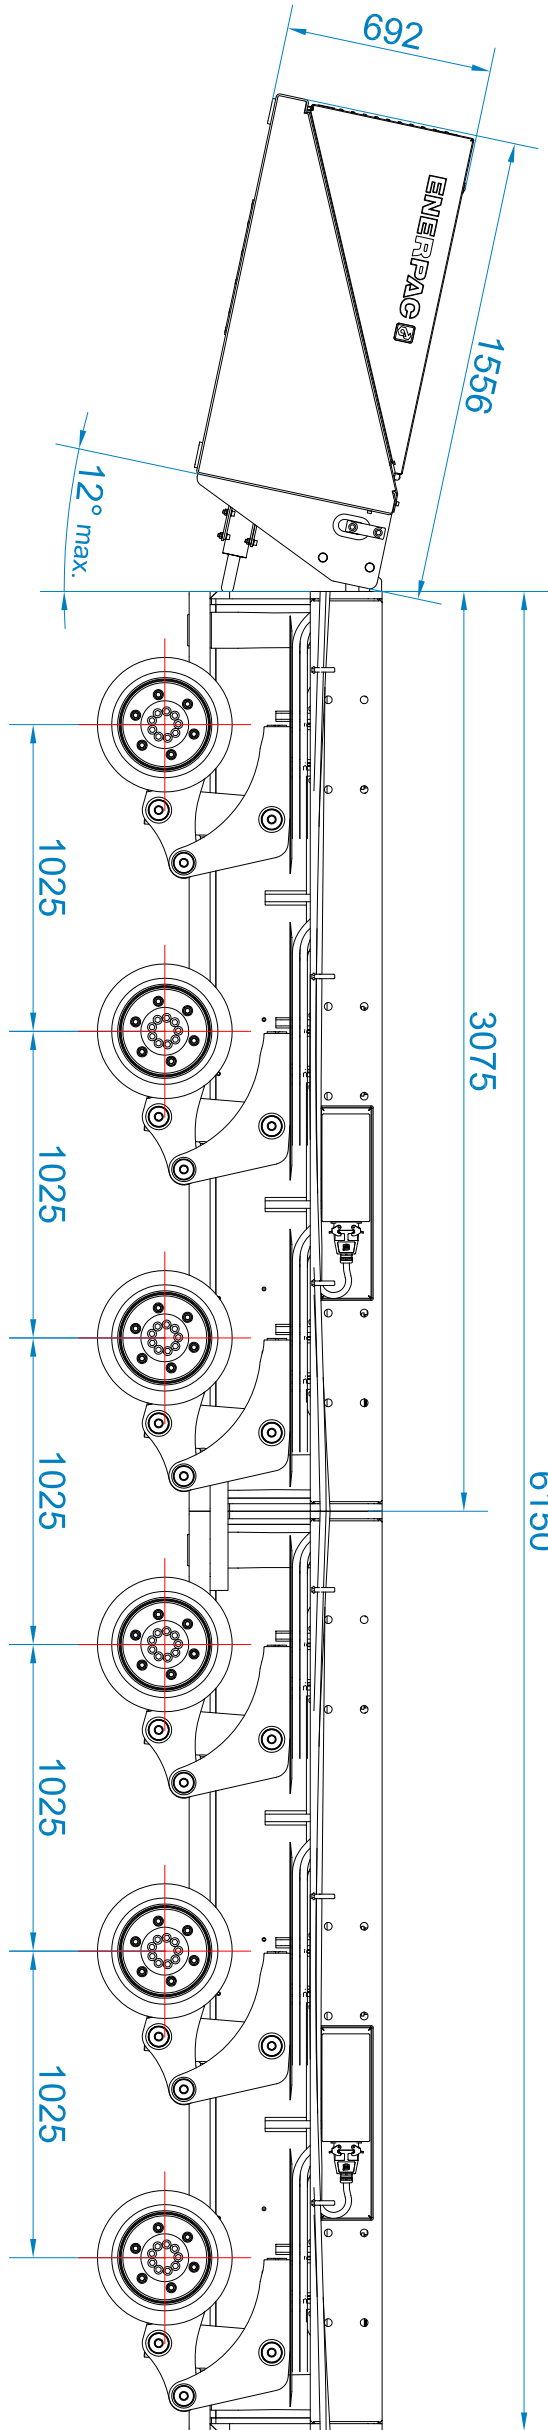

Features

- Payload: 600 kN per trailer (200 kN per line)
- Speed Idle: appr. 10.3 km/h 5.1 km/h (resp. 1.2 or 3 trailers connected to HPU)
- Speed loaded: appr. 1.5 km/h 0.7 km/h (resp. 1.2 or 3 trailers connected to HPU)
- Steering range: +175° to -175°
- Collapsed height: 770 mm
- Max. configuration: 2 rows of 6 trailers, or combinations within this range
- Power Packs: 41 kW, 1 Power Pack per 3 trailers max.